




GREASE PUMPS

Series 600

Ratio **50:1** Capacity **1500 g/min**

Polyurethane Seals

Series 600 air-operated pumps for short/long distance grease distribution, for high pressure greasing. Ideal for dispensing medium/high-viscosity grease. Suitable for mobile installations and centralised fixed systems.

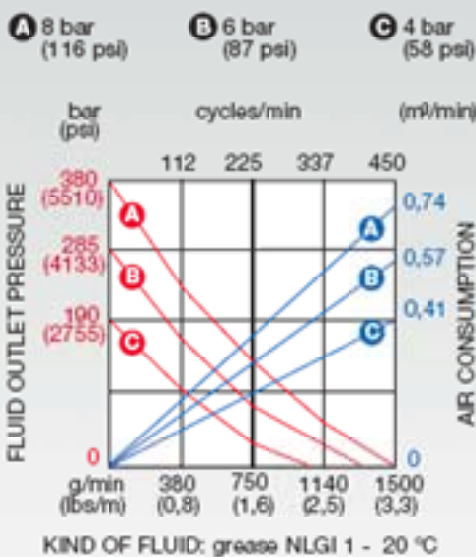

Article	62041	62048	62074	62095
Compression ratio	50:1	50:1	50:1	50:1
Air inlet connection	F1/4" G	F1/4" G	F1/4" G	F1/4" G
Grease outlet connection	F3/8" G	F3/8" G	F3/8" G	F3/8" G
Air working pressure	6-8 bar	6-8 bar	6-8 bar	6-8 bar
Air max. pressure	8 bar	8 bar	8 bar	8 bar
Average air consumption	330 l/min	330 l/min	330 l/min	330 l/min
Relative flowrate (free outlet at 6 bar)	1500 g/min	1500 g/min	1500 g/min	1500 g/min
Noise level	81 dB	81 dB	81 dB	81 dB
Suitable for drums	16 - 20 Kg	20 - 30 Kg	50 - 60 Kg	180 - 220 Kg
Suction tube length	410 mm	480 mm	740 mm	940 mm
Suction tube diameter	30 mm	30 mm	30 mm	30 mm
	No. 1 packing m ³ 0,010 kg 4,6	No. 1 packing m ³ 0,010 kg 4,8	No. 1 packing m ³ 0,020 kg 6,1	No. 1 packing m ³ 0,020 kg 6,7



The suction tube is made with a combination of special steels, heat treated, without the use of seals in order to eliminate any problem of wear.