



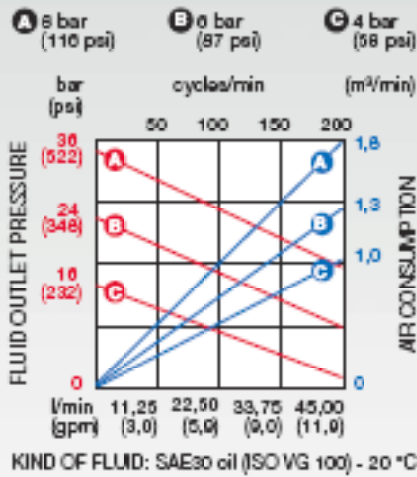

PUMPS FOR OIL AND SIMILAR






Series 900

Ratio **5:1** Capacity **45** l/min

Polyurethane seals

Series 900 industrial air-operated double-acting pumps for distribution. Suitable for transferring oils, lubricants and allied products also with very high viscosity. The double action guarantees the delivery of a continuous and constant flow, ideal for all needs. Particularly effective in systems equipped with several distribution points.



Article	90C/51	90F/51
Compatible fluids	oils, lubricants and allied products	oils, lubricants and allied products
Type of seals	polyurethane/PU	polyurethane/PU
Suction tube upper body	aluminium	carbon steel
Suction tube	carbon steel	carbon steel
Air inlet connection	F 1/2"	F 1/2"
Fluid outlet connection	F 3/4"G	F 3/4"G
Suction tube diameter	ø 62	ø 62
Max. air consumption 8 bar	1,6 m³/min	1,6 m³/min
Noise level	80 dB	80 dB
Air max. pressure	8 bar	8 bar
Suitable for drums or tanks	modular	modular
	 No. 1 packing m ³ 0,040  kg 12	 No. 1 packing m ³ 0,040  kg 13