
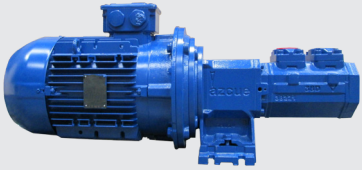





Pump Code	Pump Image	Pump Description	Dimensions	Weight
BTHM25D4		Horizontal Bareshaft Self Priming Screw Pump with Safety valve 1" Suction & Discharge Casing: Cast Iron Central Spindle: Nitrided Steel Lateral Spindle: Nitrided Cast Iron ***NO MOTOR INCLUDED***	316 x 200 x 246 (mm)	22 kg
BTHM25D4		Horizontal Self Priming Screw Pump with Safety valve 1" Suction & Discharge Casing: Ductile Cast Iron Central Spindle: Nitrided Steel Lateral Spindle: Nitrided Cast Iron Mechanical Seal Clockwise Rotation Elastic Coupling 1.1Kw/ 1.3Kw 50hz/60hz 2900/3500rpm 380V-440V IP55 Motor IE2	553 x 200 x 255 (mm)	38 kg
BTHM25D4		Horizontal Self Priming Screw Pump with Safety valve 1" Suction & Discharge Casing: Ductile Cast Iron Central Spindle: Nitrided Steel Lateral Spindle: Nitrided Cast Iron Mechanical Seal Clockwise Rotation Elastic Coupling 1.1Kw/ 1.3Kw 50hz/60hz 1450/1750rpm 380V-440V IP55 Motor IE2	597 x 200 x 264 (mm)	44 kg
BTHM32D4		Horizontal Self Priming Screw Pump with Safety valve 1.5" Suction, 1" Discharge Casing: Ductile Cast Iron Central Spindle: Nitrided Steel Lateral Spindle: Nitrided Cast Iron Mechanical Seal Clockwise Rotation Elastic Coupling 3Kw/ 3.5Kw 50hz/60hz 2900/3500rpm 380V-440V IP55 Motor IE2	675 x 250 x 319 (mm)	60 kg
BTHM32D4		Horizontal Self Priming Screw Pump with Safety valve 1.5" Suction, 1" Discharge Casing: Ductile Cast Iron Central Spindle: Nitrided Steel Lateral Spindle: Nitrided Cast Iron Mechanical Seal Clockwise Rotation Elastic Coupling 3.5Kw/ 3Kw 50hz/60hz 1450/1750rpm 380V-440V IP55 Motor IE2	675 x 250 x 319 (mm)	63 kg



Pump Code	Pump Image	Pump Description	Dimensions	Weight
BTHM32D4		Horizontal Bareshaft Self Priming Screw Pump with Safety valve 1.5" Suction, 1" Discharge Casing: Cast Iron Central Spindle: Nitrided Steel Lateral Spindle: Nitrided Cast Iron ***NO MOTOR INCLUDED***	339 x 200 x 255 (mm)	22 kg
BTHM38D4		Horizontal Self Priming Screw Pump with Safety valve DN40mm Suction & Discharge Casing: Ductile Cast Iron Central Spindle: Nitrided Steel Lateral Spindle: Nitrided Cast Iron Mechanical Seal Clockwise Rotation Elastic Coupling 5.5Kw/ 6.4Kw 50hz/60hz 2900/3500rpm 380V-440V IP55 Motor IE2	822 x 300 x 368 (mm)	61 kg
BTHM38D4		Horizontal Self Priming Screw Pump with Safety valve DN40 1.25" Suction & Discharge Casing: Ductile Cast Iron Central Spindle: Nitrided Steel Lateral Spindle: Nitrided Cast Iron Mechanical Seal Clockwise Rotation Elastic Coupling 5.5Kw/ 6.4Kw 50hz/60hz 1450/1750rpm 380V-440V IP55 Motor IE2	822 x 300 x 368 (mm)	56 kg