VERTICAL PUMPS TYPE GP

Costruite in materiali resistenti alla corrosione - PP PVC PVDF - le pompe centrifughe verticali AS20 vengono prodotte su misura adattandosi così ad installazioni in vasche, serbatoi, pozzetti con liquido a livello fisso o variabile.

I componenti strutturali ed idraulici sono realizzati interamente in plastica (stampati, trafilati o estrusi) e gli alberi e la bulloneria sono rivestiti negli stessi materiali anticorrosione.

Made with corrosion resistant materials – PP PVC PVDF – vertical centrifugal pumps AS20 are custom-tailored and suitable to be installed upon tank, sump and reservoir both with liquid level fixed and variable.
Structural and hydraulic pumps components are entirely made with plastic materials (molded, drawn or extruded) while shaft and bolts & nuts are coated with the same corrosion-resistant materials.

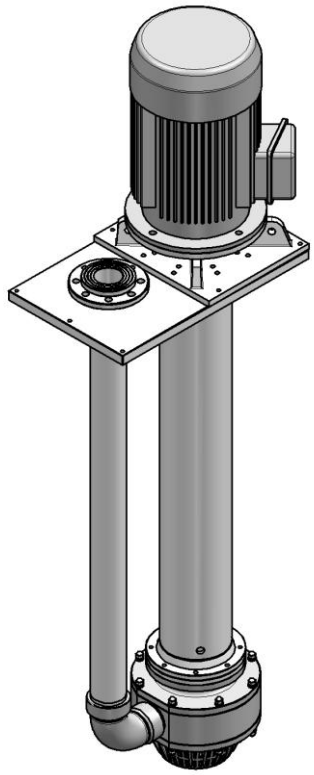

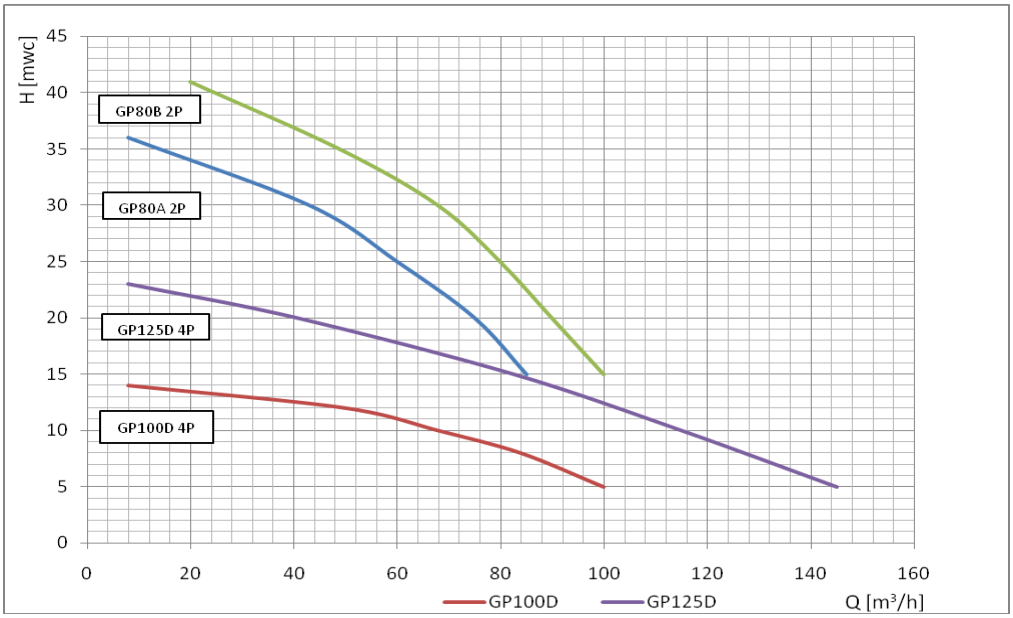

SAVINO BARBERA

TAVOLA DELLE PRESTAZIONI – *Performances table*

Pump type	kW	*poles*	*Girante impeller*	Prevalenza totale – *Total head*											
				H [m w.c.]		5	10	15	20	25	30	35	40		
80A	15	2	Aperta *open*	Q	m^3/h	105	95	85	75	59	43	0			
					l/min	1750	1580	1415	1250	980	715	0			
				SG	$Kgdm^3$	1.0	1.0	1.1	1.1	1.2	1.3	1.6			
80B	18.5	2	Aperta *open*	Q	m^3/h	120	108	100	90	80	68	49	30		
					l/min	2000	1800	1665	1500	1330	1130	815	500		
				SG	$Kgdm^3$	1.2	1.2	1.2	1.3	1.3	1.4	1.4	1.4		

Pump type	kW	*poles*	*Girante impeller*	Prevalenza totale – *Total head*											
				H [m w.c.]		4	6	8	10	12	14	18	20	24	
100D	9.2	4	Aperta *open*	Q	m^3/h	125	120	105	91	73	48				
					l/min	2090	2000	1780	1530	1225	800				
				SG	$Kgdm^3$	1.2	1.2	1.2	1.2	1.2	1.2				
125D	15	4	Aperta *open*	Q	m^3/h	150	135	120	115	100	80	60	40	0	
					l/min	2500	2250	2000	1915	1660	1330	1000	660	0	
				SG	$Kgdm^3$										