





# Air-operated pumps for DISTRIBUTION




Ratio **3:1** Flow rate **20 l/min**

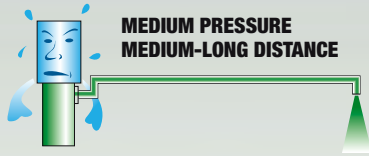


**Air-operated pumps series 500 and 600 for medium distance distribution.** Ideal for transferring low-medium viscosity fluids such as: oils, lubricants and similar products. Suitable for mobile unit or fixed installation. The wall-mounted version of these pumps, mounted on wall or in a fixed position by means of the special accessories (refer to page 107), enables numerous uses through the application of modular extensions (refer to page 112).

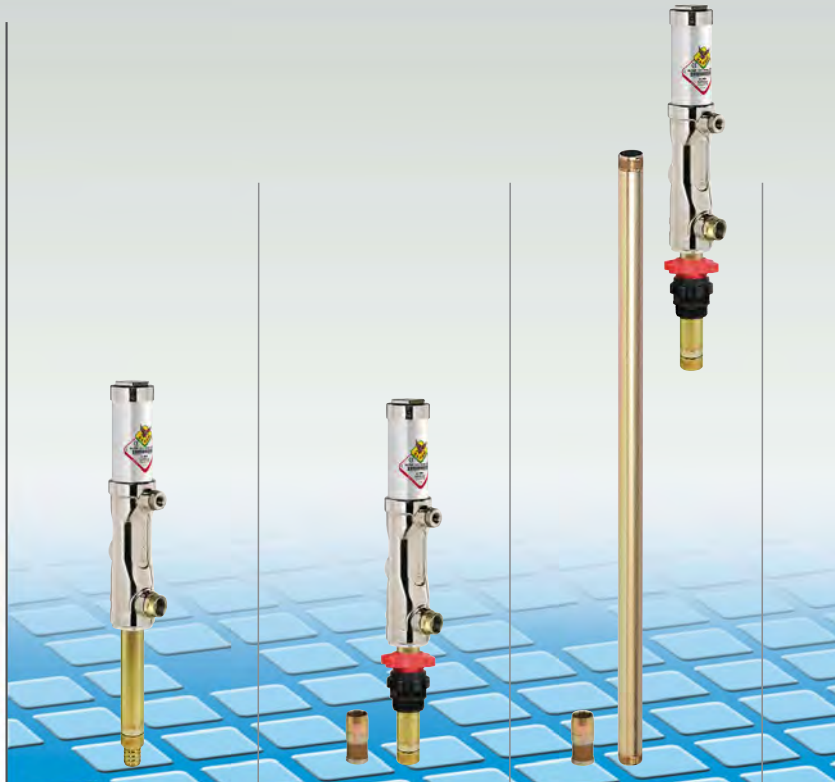


series 500

Article with seals in	<b>NBR</b>		
Article with seals in	<b>NBR</b>		
Article with seals in	<b>VITON</b>	<b>35060</b>	<b>35061</b>
Compatible fluids		Oils, lubricants and similar	
Suction tube upper body		Aluminium	
Suction tube		Carbon steel	
Air inlet connection	bsp	F 1/4" G	F 1/4" G
Fluid outlet connection	bsp	F 1/2" G	F 1/2" G
Air working pressure	bar	4 - 8	4 - 8
Average air consumption	l/min	350	350
Noise level	dB	81	81
Max deliverable oil viscosity	SAE	130	130
Bung adaptor		standard	standard
Suitable for drums or tank		 modular	 customisable 1"
		 tank	
Packing	N° - m <sup>3</sup>	1 - 0,01	1 - 0,01
Weight	Kg	5,35	5,8
Dimensions (A - B - C)	cm	33,2 - 20 - 3,2	33,2 - 18,5 - 3,2

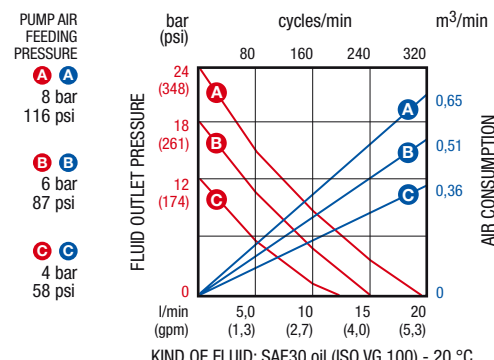

KIND OF FLUID: SAE30 oil (ISO VG 100) - 20 °C

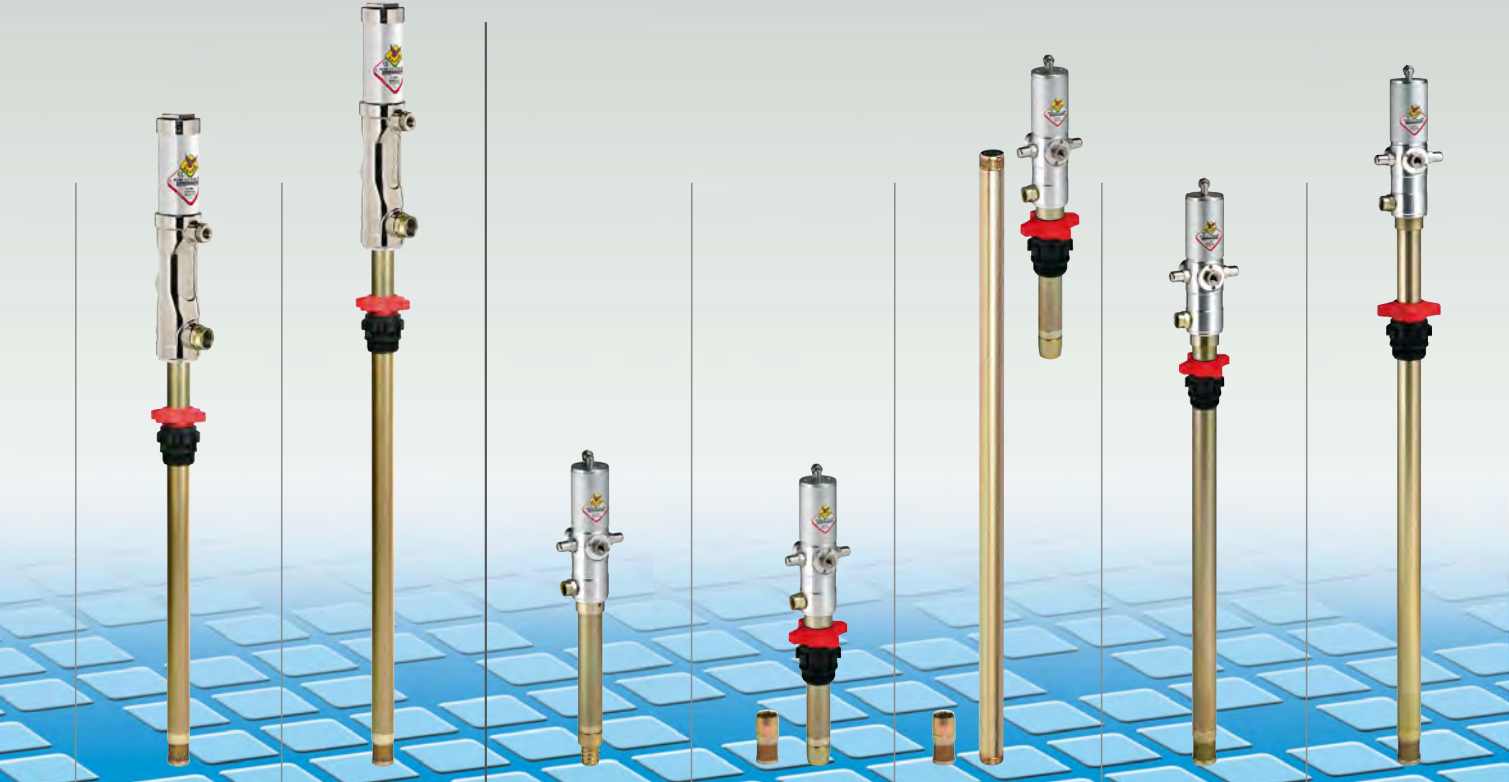

series 500		series 600				
		35160	35161	35163	35173	35194
					35176	35196
<b>35076</b>	<b>35094</b>					
Oils, lubricants and similar Aluminium Carbon steel		Oils, lubricants and similar Aluminium Carbon steel				
F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G	F 1/4" G
F 1/2" G	F 1/2" G	F 1/2" G	F 1/2" G	F 1/2" G	F 1/2" G	F 1/2" G
4 - 8	4 - 8	6 - 8	6 - 8	6 - 8	6 - 8	6 - 8
350	350	330	330	330	330	330
81	81	81	81	81	81	81
130	130	130	130	130	130	130
standard	standard	-	standard	standard	standard on 35176	standard on 35196
suitable for drums 50-60 Kg	suitable for drums 180-220 Kg	modular	customisable 1"	tank	suitable for drums 50-60 Kg	suitable for drums 180-220 Kg
1 - 0,01	1 - 0,01	1 - 0,01	1 - 0,01	1 - 0,02	1 - 0,020	1 - 0,020
5,8	6,5	4,4	5,0	6,8	5,8	6,5
33,2 - 74 - 3,2	33,2 - 94 - 3,2	28,5 - 28,5 - 4,2	28,5 - 22 - 4,2	28,5 - 125 - 4,2	28,5 - 74 - 4,2	28,5 - 94 - 4,2

